


## 4 POE PORTS 10/100M SWITCH + 1 UPLINK PORT

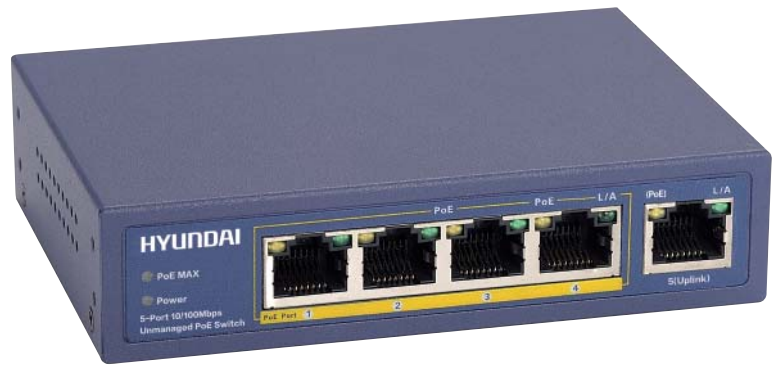

### FEATURES

- Transmission up to 100 meters
- Compatible with IEEE 802.3af standard
- PoE power supply up to 15,4W per port
- Automatic connected device detection
- Plug&Play
- Great quality/price
- Use UTP CAT5 cable or superior
- Unmanageable switch (L2)

### PORT DESCRIPTION

PoE ports	4x RJ45 10/100M autonegotiated
Uplink ports	5th port RJ45 10/100M autonegotiated

### POE POWER SUPPLY

PoE max output	15,4W
Total consumption	65W
PoE port priority	Supported

### GENERAL

Processing type	store and forward
Transmission model	IEEE802.3X full-duplex / Backpressure half-duplex
Backplane bandwidth	1Gbps
Package transference rate	0,74Mpps
MAC address	2K
Standard	IEEE802.3i 10 BASE-T, IEEE802.3u 100 BASE-TX, IEEE802.3x flux control, IEEE802.3af (PoE), IEEE802.3az EEE

### ELECTRICAL & ENVIRONMENTAL

Power supply	52V CC, 1,25A
Working temperature	-10°C ~ +45°C, 10% ~ 90% RH

### PHYSICAL FEATURES

Dimensions	118 x 85 x 28 mm
------------	------------------