

## DS-K7P04 Exit Button




### Features

- Dimension (L × W × H): 90 mm × 35 mm × 37.7 mm (3.54" × 1.38" × 1.48").
- Input Voltage: 12 VDC.
- Working Current: 40 mA (standby), 70 mA (working).
- Current Rating: 1 A@30 VDC.
- Output Contact: NO/NC/COM contact.
- Panel: Stainless steel.
- Aging Test: Already passed 1 million times aging test.
- Suitable Doors: All kinds of narrow doorframes.
- Working Temperature: -20 °C to 50 °C (-4 °F to 122 °F).
- Working Humidity: 0 to 95% (relative humidity).
- Detection Range (Adjustable): 40 mm to 120 mm (1.57 to 4.72").
- Time Delay: 1 to 25 s (adjustable)
- LED Indicator Status: Green/red LED indicates working/standby.
- Product Weight: 0.18 kg (0.40 lb).

## Dimension and Installation

### Dimension

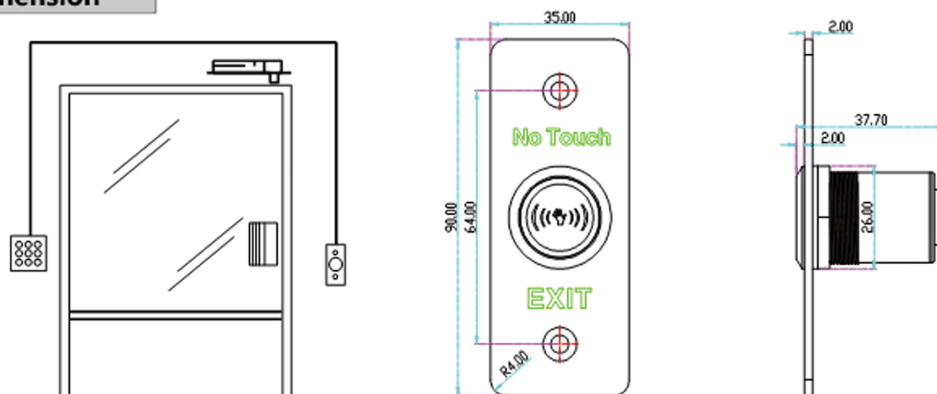


### Installation

Detection range: 4-12cm(Adjustable)

VR1 illustration:

- ⊕ The Farthest distance
- ⊕ The Nearest distance



Time delay: 1S~25S

VR2 illustration:

- ⊕ Min.time delay
- ⊕ Max.time delay

Distributed by