

DS-D5AOW




- Built-in 6 microphone arrays, beam forming, clear collection of speaker voice
- 5 meters 360-degree sound range, a single device can meet the needs of most meeting rooms
- Wireless Bluetooth direct connection, USB, AUX cable, USB Bluetooth adapter, 4 connection methods
- Support AEC, wide echo cancellation algorithm, automatically match various output devices
- Support AGC, automatic gain control to ensure the clarity of distant speakers
- Support ANC, intelligent noise reduction technology, to investigate the impact of environmental noise on the conference effect
- Support VAD, automatically stop sound collection when no one speaks
- Support connection to PC, interactive smart tablet, mobile phone and other devices

▪ Specification

Interface	
USB and audio Interface	1(Audio IN/OUT+Charge 5V/2A) 1(Audio IN/OUT)
Button	6
Indicator	Power /Volume/Button
Version	BT4.2+EDR
Working Frequency	2.4GHz
Working Distance	10m
USB dongle	Supports audio input and output Compatible with Windows, Mac system
Power	
Battery capacity	7.4V/2200mAh
Battery charging	Wired: 5V/2A Wireless: 5W(optional)
Continuous working time	8h(Voice communication with the maximum volume)
Pickup	
Microphone Type	6-Element Array,Omnidirectional
Pickup Distance	5m(Radius)
Frequency Range	150Hz ~7.5kHz
General	
Working Temperature	0°C~40°C
Working Humidity	10%~90%RH
Dimension(Diameter ×Height)	120×36.5mm
Dimension(package) L×W×H	225×158×50mm
Net Weight	390g
Gross Weight	692g
Storage Temperature	-20°C~60°C
Storage Humidity	10%~90%RH
Altitude	Below 5000 meters
Speaker	
Sound Channel	1.0
Output Power	1×5W
Maximum Sound Pressure Level	85dB SPL@0.5m,1kHz
Distortion	≤ 1% @1W,1kHz
Signal to Noise Ratio	≥ 75dB
Frequency Range	150Hz~16kHz

▪ Available Model

▪ Dimension

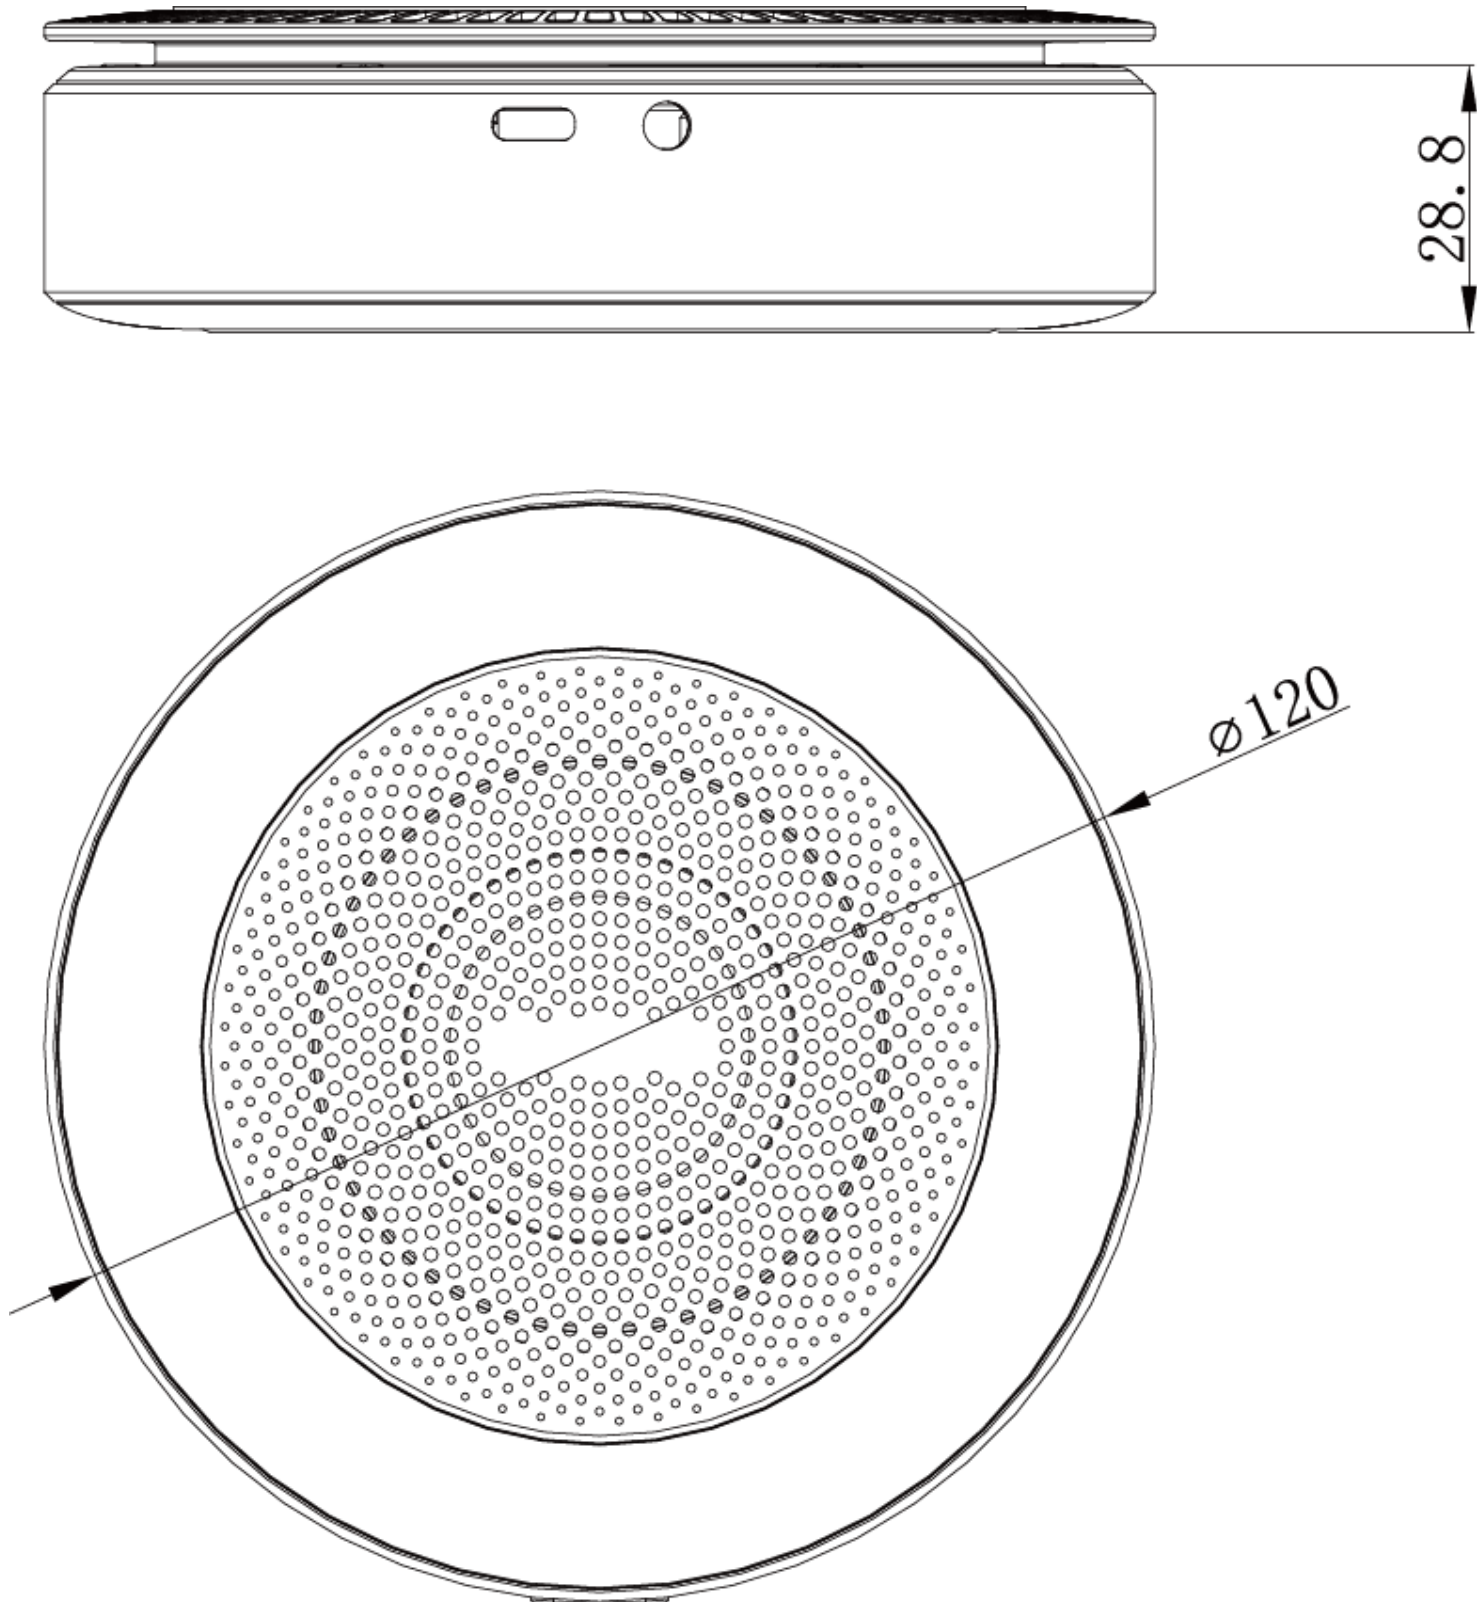

▪ **Accessory**

▪ **Optional**

DS-D5A55RB/B 55-inch 4K Interactive Display	DS-D5A65RB/B 65-inch 4K Interactive Display	DS-D5A86RB/B 86-inch 4K Interactive Display	DS-D5A75RB/B 75-inch 4K Interactive Display
