



# DHI-NVR5216-8P-I/L

16Channel 1U 2HDDs 8PoE WizMind Network Video Recorder





Launched by Dahua Technology, Dahua WizMind is a full portfolio of solutions composed of project-oriented products including IPC, NVR, PTZ, XVR, Thermal and software platform which adopts industry-leading deep learning algorithms. Focusing on customer's requirements, WizMind provides precise, reliable and comprehensive AI solutions for verticals.

# Overview

Dahua new NVR5000-I/L network video recorder delivers excellent performance and high recording quality that is ideally suitable for IP video surveillance applications. This NVR adopts powerful processor, providing the capability of 4K resolution processing for applications where image details are highly required. Additionally, the NVR can be served as edge storage, central storage or backup storage with an intuitive shortcut operation menu for remote management and control.

With build-in deep learning module, NVR5000-I/L series products adopt video image structuring technology based on deep learning algorithms, achieving high-precision human face recognition and perimeter protection. By applying deep learning artificial intelligence, NVR5000-I/L allows users to focus on what matters most, improves event response time and helps make video actionable.

The NVR is compatible with numerous third-party devices, which make it the perfect solution for surveillance systems that work independently of video management system (VMS).

#### **Functions**

# **Perimeter Protection**

Automatically filtering out false alarms caused by animals, rustling leaves, bright lights, etc. Enables system to act secondary recognition for the targets. Improving alarm accuracy.

#### **Face Recognition**

Dahua Face Recognition technology extracts the features of captured faces and compares them with that in face database to recognize the person identity.

- Smart H.265+/H.265/Smart H.264+/H.264/MJPEG
- Up to 4 Channel video metadata
- Up to 12 Channel perimeter protection, SMD Plus
- Up to 4 Channel video stream face recognition
- Up to 16 face pictures/sec processing
- Up to 20 face databases with 200,000 face images in total
- 1-8 PoE Ports support ePoE & EoC



#### **SMD Plus**

With intelligent algorithm, Dahua Smart Motion Detection technology cancategorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.

#### Video Metadata

With deep learning algorithm, Dahua Video Metadata technology can detect, track, capture vehicle, non-motor vehicle and people, and select the best images, and extract attributes.

# **ANPR by Camera**

With deep learning algorithm, Dahua ANPR technology can recognize the number plate information of vehicles in the image with ANPR cameras. Support block/allowlist mode, searching target vehicles from recorded video.

### **People Counting by Camera**

With deep learning algorithm, Dahua People Counting technology can track and process moving human body targets to realize the accurate statistics of enter No., leave No., and In Area No. Working with management platform, it outputs yearly/monthly/weekly/daily reports to meet your requirements.

#### Stereo Analysis by Camera

With deep learning algorithm and scene 3-dimensional information, Dahua Stereo Analysis technology can recognize people's behaviors, such as fall detection, violence detection, strand detection, and space exception, and then generates alarm signals and triggers linkage.


Technical Specification		Record Interval	1–120 min (default: 60 min), Pre-record: 1–30 sec, Post-record: 10–300 sec
System		Video Detection and Alarm	
Main Processor	Multi-core embedded processor	Trigger Events	Alarm Out, Video Push, Email, Recording, PTZ, Tour, Snapshot, Voice Prompt, Buzzer and Screen Tips
Operating System  Perimeter Protection	Embedded LINUX	Video Detection	Motion Detection, MD Zones: 396 (22 × 18), Video Loss, Tampering and Scene Change
Performance	12 channel, 10 IVS rules for each channel	Alarm input	4 Channel
Object classification	Human/Vehicle secondary recognition for tripwire and intrusion	Relay Output	2 Channel
Al Search	Search by target classification (Human, Vehicle)	Playback and Backup	
Face Recognition		Sync Playback	1/4/9/16
	Max 16 face pictures/sec processing (modeling and comparing)	Search Mode	Time/Date, Alarm, MD and Exact Search (accurate to second)
Performance	4 channel video stream face recognition/16 channel picture stream face recognition (with FD camera)	Backup Mode	USB Device/Network
Church and Marile	Detect strangers' faces (not in device's face database).	Third-party Support	
Stranger Mode  Al Search	Similarity threshold can be set manually.  Up to 8 target face images search at same time, similarity	Third-party Support	Panasonic, Sony, Samsung, Axis, Pelco, Arecont, Onvif, Canon and more
, ii searen	threshold can be set for each target face image.  Up to 20 face databases with 200,000 face images in	Network	
Database Management	total. Name, gender, birthday, nationality, address, ID information can be added to each face picture.	Interface	1 RJ-45 Ports (10/100/1000 Mbps)
Database Application	Each database can be applied to video channels independently.	PoE	8 ports (IEEE802.3af/at) 1-8 ports support ePoE & EoC
Trigger Events	Buzzer, Voice Prompts, Email, Snapshot, Recording, Alarm Out, PTZ Activation, etc.	Network Protocol	HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, SNMP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm
Metadata			Server, IP Search (Support Dahua IP camera, DVR, NVS, etc.), P2P
Face	Gender, age, glasses, beard, mouth mask, expression.	Max. User Access	128 users
Vehicle	Plate No., type, color, vehicle type, logo, plate color, ornament, calling, seatbelt, region.	Mobile App	iPhone, iPad, Android
		Interoperability	ONVIF 2.4, SDK, CGI
Human Body  Top, top color, bottom, bottom color, hat, bag, gender, age, umbrella.		Storage	
Non-motor Vehicle	Type, color, number of passengers, helmet.	Internal HDD	2 SATA III ports, up to 10 TB for a single HDD. The maximum HDD capacity varies with environment
Al Search	Support search target video by metadata.	-CATA	temperature
Audio and Video		eSATA	N/A
IP Camera Input	16 Channel	Auxiliary Interface	
Two-way Talk	1 Channel Input, 1 Channel Output, RCA	USB	2 USB Ports (1 Rear USB 3.0, 1 Front USB 2.0)
Display		RS232	1 Port, for PC Communication and Keyboard
Interface	1 HDMI, 1 VGA	RS485	1 Port, for PTZ Control
Resolution	HDMI: 3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720 VGA: 1920 × 1080, 1280 × 1024, 1280 × 720	Electrical	
Decoding Capability	4-ch@8MP (30fps), 16-ch@1080P (30fps)	Power Supply	Single, AC100V–240V, 50–60 Hz
Multi-screen Display	1/4/8/9/16	Power Consumption	NVR: <15.6W (Without HDD)
Recording	2, 1, 4, 4, 20	. The consumption	PoE: Max 25.5W for single port 130W total rated power, 80% control for protection
Bandwidth	320 Mbps (160 Mbps when Al function enabled)	Fan	Smart fan, automatically adjust running speed
Compression	Smart H.265+/H.265/Smart H.264+/H.264/MJPEG	Environmental	
·	24MP, 16MP, 12MP, 8MP, 6MP, 5MP, 4MP, 3MP, 1080P,	Operating Conditions	-10°C to +55°C (+14°F to +131°F), 86–106kpa
Resolution	1.3MP, 720P, D1 etc.	Storage Conditions	0°C to +40°C (+32°F to +104°F), 30–85% RH
Record Mode	Manual, Schedule (Continuous, MD (Motion Detection), Alarm, IVS)	Construction	


# Wiz Mind | DHI-NVR5216-8P-I/L

Dimensions	1U, 375.0 mm $\times$ 327.4 mm $\times$ 53.0 mm (14.76" $\times$ 12.89" $\times$ 2.09")			
Net Weight	2.70 kg (6.0 lb) (without HDD)			
Gross Weight	4.00 kg (8.8 lb) (without HDD)			
Certifications				
CE	EN55032, EN55024, EN50130-4, EN62368-1			
FCC	Part 15 Subpart B, ANSI C63.4-2014			


Ordering Information				
Туре	Model	Description		
16 Channel WizMind NVR	DHI-NVR5216- 8P-I/L	16 Channel 1U 2HDDs 8PoE WizMind Network Video Recorder		

# Dimensions (mm[inch])



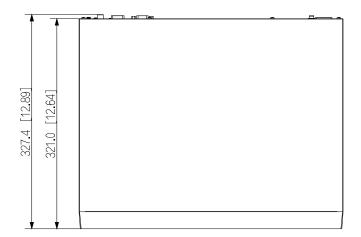

# Panels

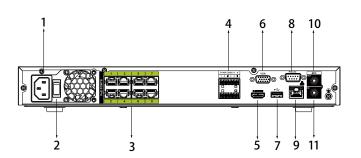

- 1 Power Input
- 3 PoE Ports
- 5 HDMI Port
- 7 USB Port
- 9 Network Port
- 11 AUDIO IN, RCA Connector
- 2 Power Switch
- 4 Alarm In/Out
- 6 VGA Port
- 8 RS-232 Port
- 10 AUDIO OUT, RCA Connector