

## DS-3E0105D-O 5-Port Fast Ethernet Plastic Switch




DS-3E0105D-O provides 5×10/100 Mbps Ethernet ports which support line speed forwarding. With simple and mini exquisite body, the switch is plug and play and easy to use, suitable for home, school, dormitory, office, small monitoring and other simple network environments.

- 5 x 10/100 Mbps ethernet ports
- Supports ADI/ADIX
- Store-and-forward switching
- Supports MAC address auto-learning and aging
- Simple, compact body design
- Supports desktop and wall-mounting installation
- Plug & play, easy to use

## ▪ Specification


Model		DS-3E0105D-O
<b>Network Parameters</b>	Ports	5 × 10/100 Mbps RJ45 port
	MAC Address Table	2 K
	Switching Capacity	1 Gbps
	Packet Forwarding Rate	0.74 Mpps
	Internal Cache	0.768 Mbits
<b>General</b>	Shell	ABS
	Net Weight	0.093 kg (0.205 lb)
	Gross Weight	124.00 mm × 22.00 mm × 54.00 mm (4.88" × 0.87" × 2.13")
	Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
	Operating Humidity	5% to 95% (no condensation)
	Relative Humidity	5% to 95% (no condensation)
	Power Supply	5 VDC, 0.6 A
Installation Mode	Desk-Mounted	
<b>Approval</b>	EMC	FCC (47 CFR Part 15, Subpart B), CE-EMC (EN 55032: 2015+A11: 2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN 55035: 2017+A11: 2020), IC (ICES-003: Issue 7:2020)
	Safety	UL (UL 60950-1), CB (AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second Edition), CE-LVD (EN 62368-1: 2014+A11: 2017)
	Chemistry	CE-RoHS (2011/65/EU), WEEE (2012/19/EU), Reach (Regulation (EC) No.1907/2006)

▪ **Typical Application**

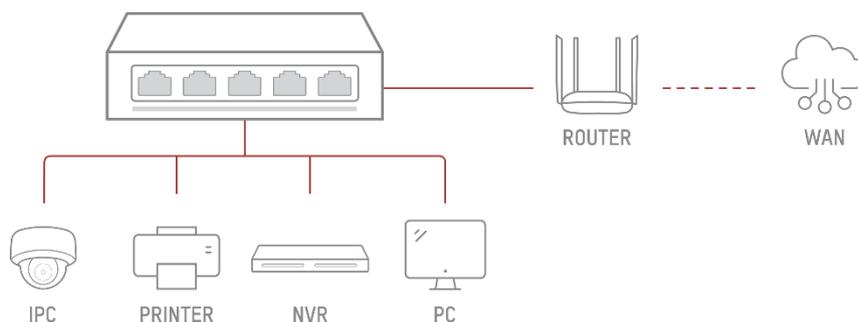

▪ **Physical Interface**

No.	Indicator/Port	Description
①	100 Mbps RJ45 Port	Used for connection to another device via a network cable.
②	LINK/ACT Indicator	Indicates the statuses of 100 Mbps RJ45 ports 1 to 5.
③	PWR Indicator	Indicates the power status of the switch.
④	Power Supply	Use the attached power adapter to connect the switch to a socket.

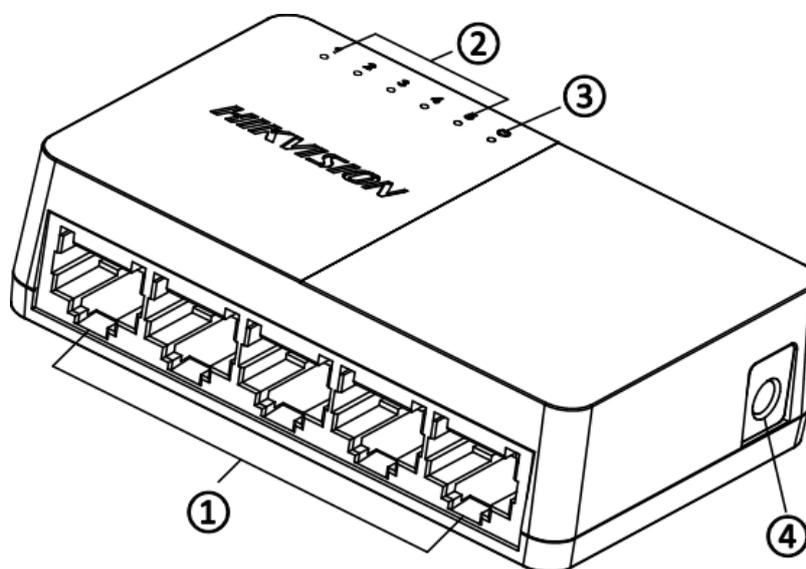

▪ **Available Model**

DS-3E0105D-O

▪ Dimension

