

## HK-SFP-1.25G Series SFP Module

### Features and Functions

- Single Power Supply 3.3V
- Small Form Factor Pluggable (SFP) MSA Compatible
- Single Fiber Bi-Direction LC Connector
- Hot Pluggable Capability
- Compliant With ROHS Standard
- Cost effective SFP solution, enables higher port densities and greater bandwidth
- Support 1.25G Ethernet




## Specifications

Item	HK-SFP-1.25G-20-1310	HK-SFP-1.25G-20-1550
Fiber type	SMF, Single fiber, 9/125um	
Connector	LC	
Data Rate	1250 Mbps	
Connector quantity	1	
Distance	0~20km	
Wavelength	Tx1310nm/Rx1550nm	Tx1550nm/Rx1310nm
TX Power	-9~-1dBm	
RX Sens(Max.)	-21dBm	
Operating temperature	0~70°C	
Storage temperature	-40~85°C	
Relative humidity	30~80%	
Power supply voltage	DC 3.3V	

**Note:** HK-SFP-1.25G-20-1310 has to work with HK-SFP-1.25G-20-1550 as a pair.

## Typical applications

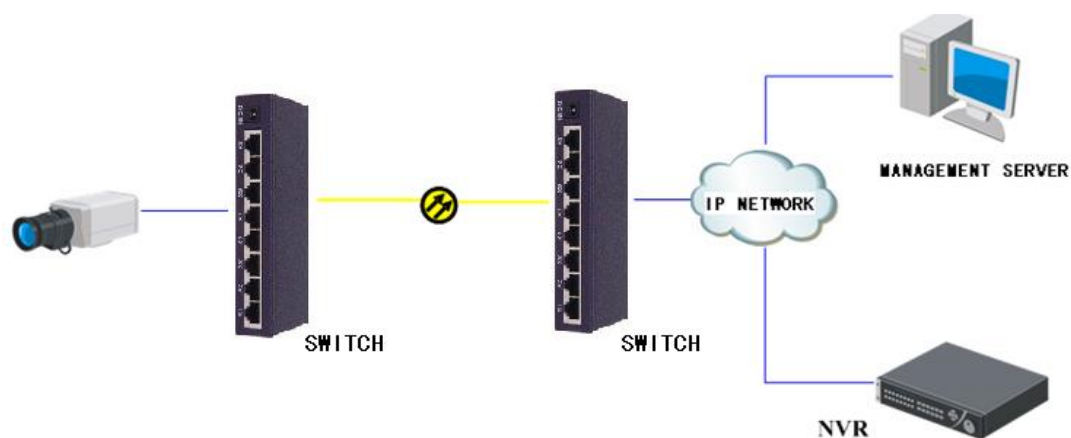

**Mechanical (mm)**

