



Superior MotionProtect Plus G3 Fibra

Wired IR motion detector with an additional K-band microwave sensor and anti-masking system

Ajax Superior products are available exclusively to accredited Ajax Systems partners for sales, installation, and maintenance, creating a protected, high-value revenue channel.





3
GRADE
EN 50131

PD 6662
2017

INCERT

SSF

IN PROGRESS

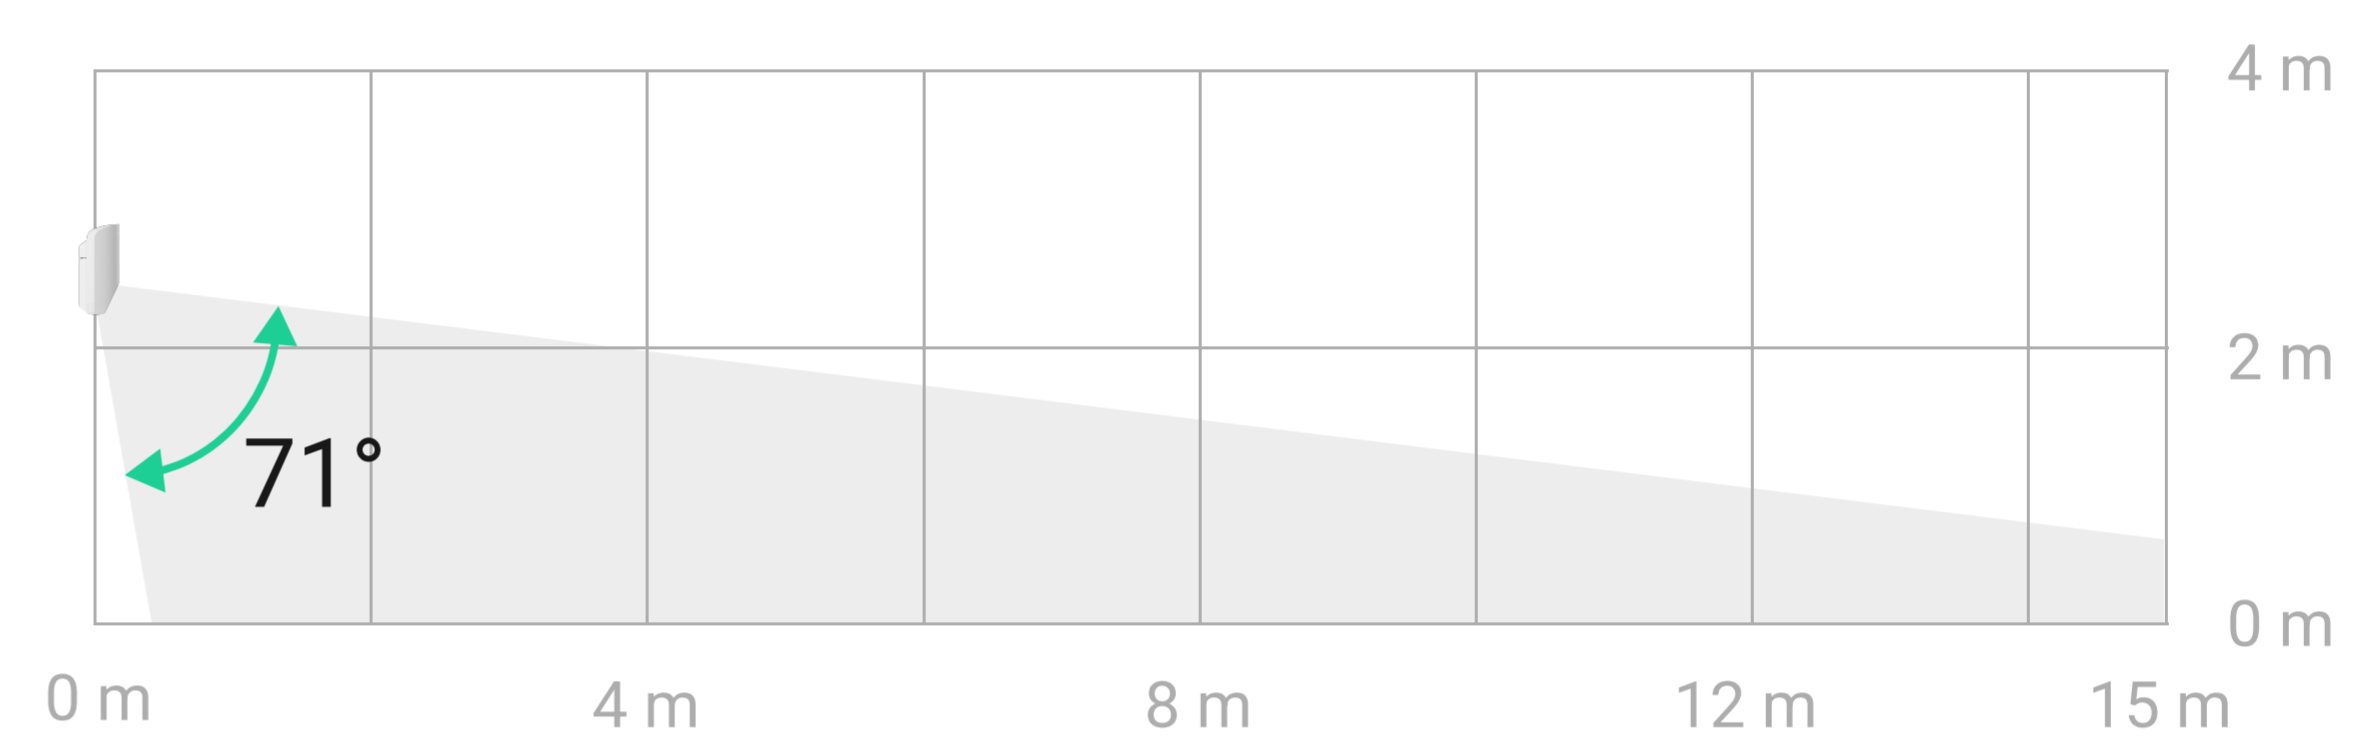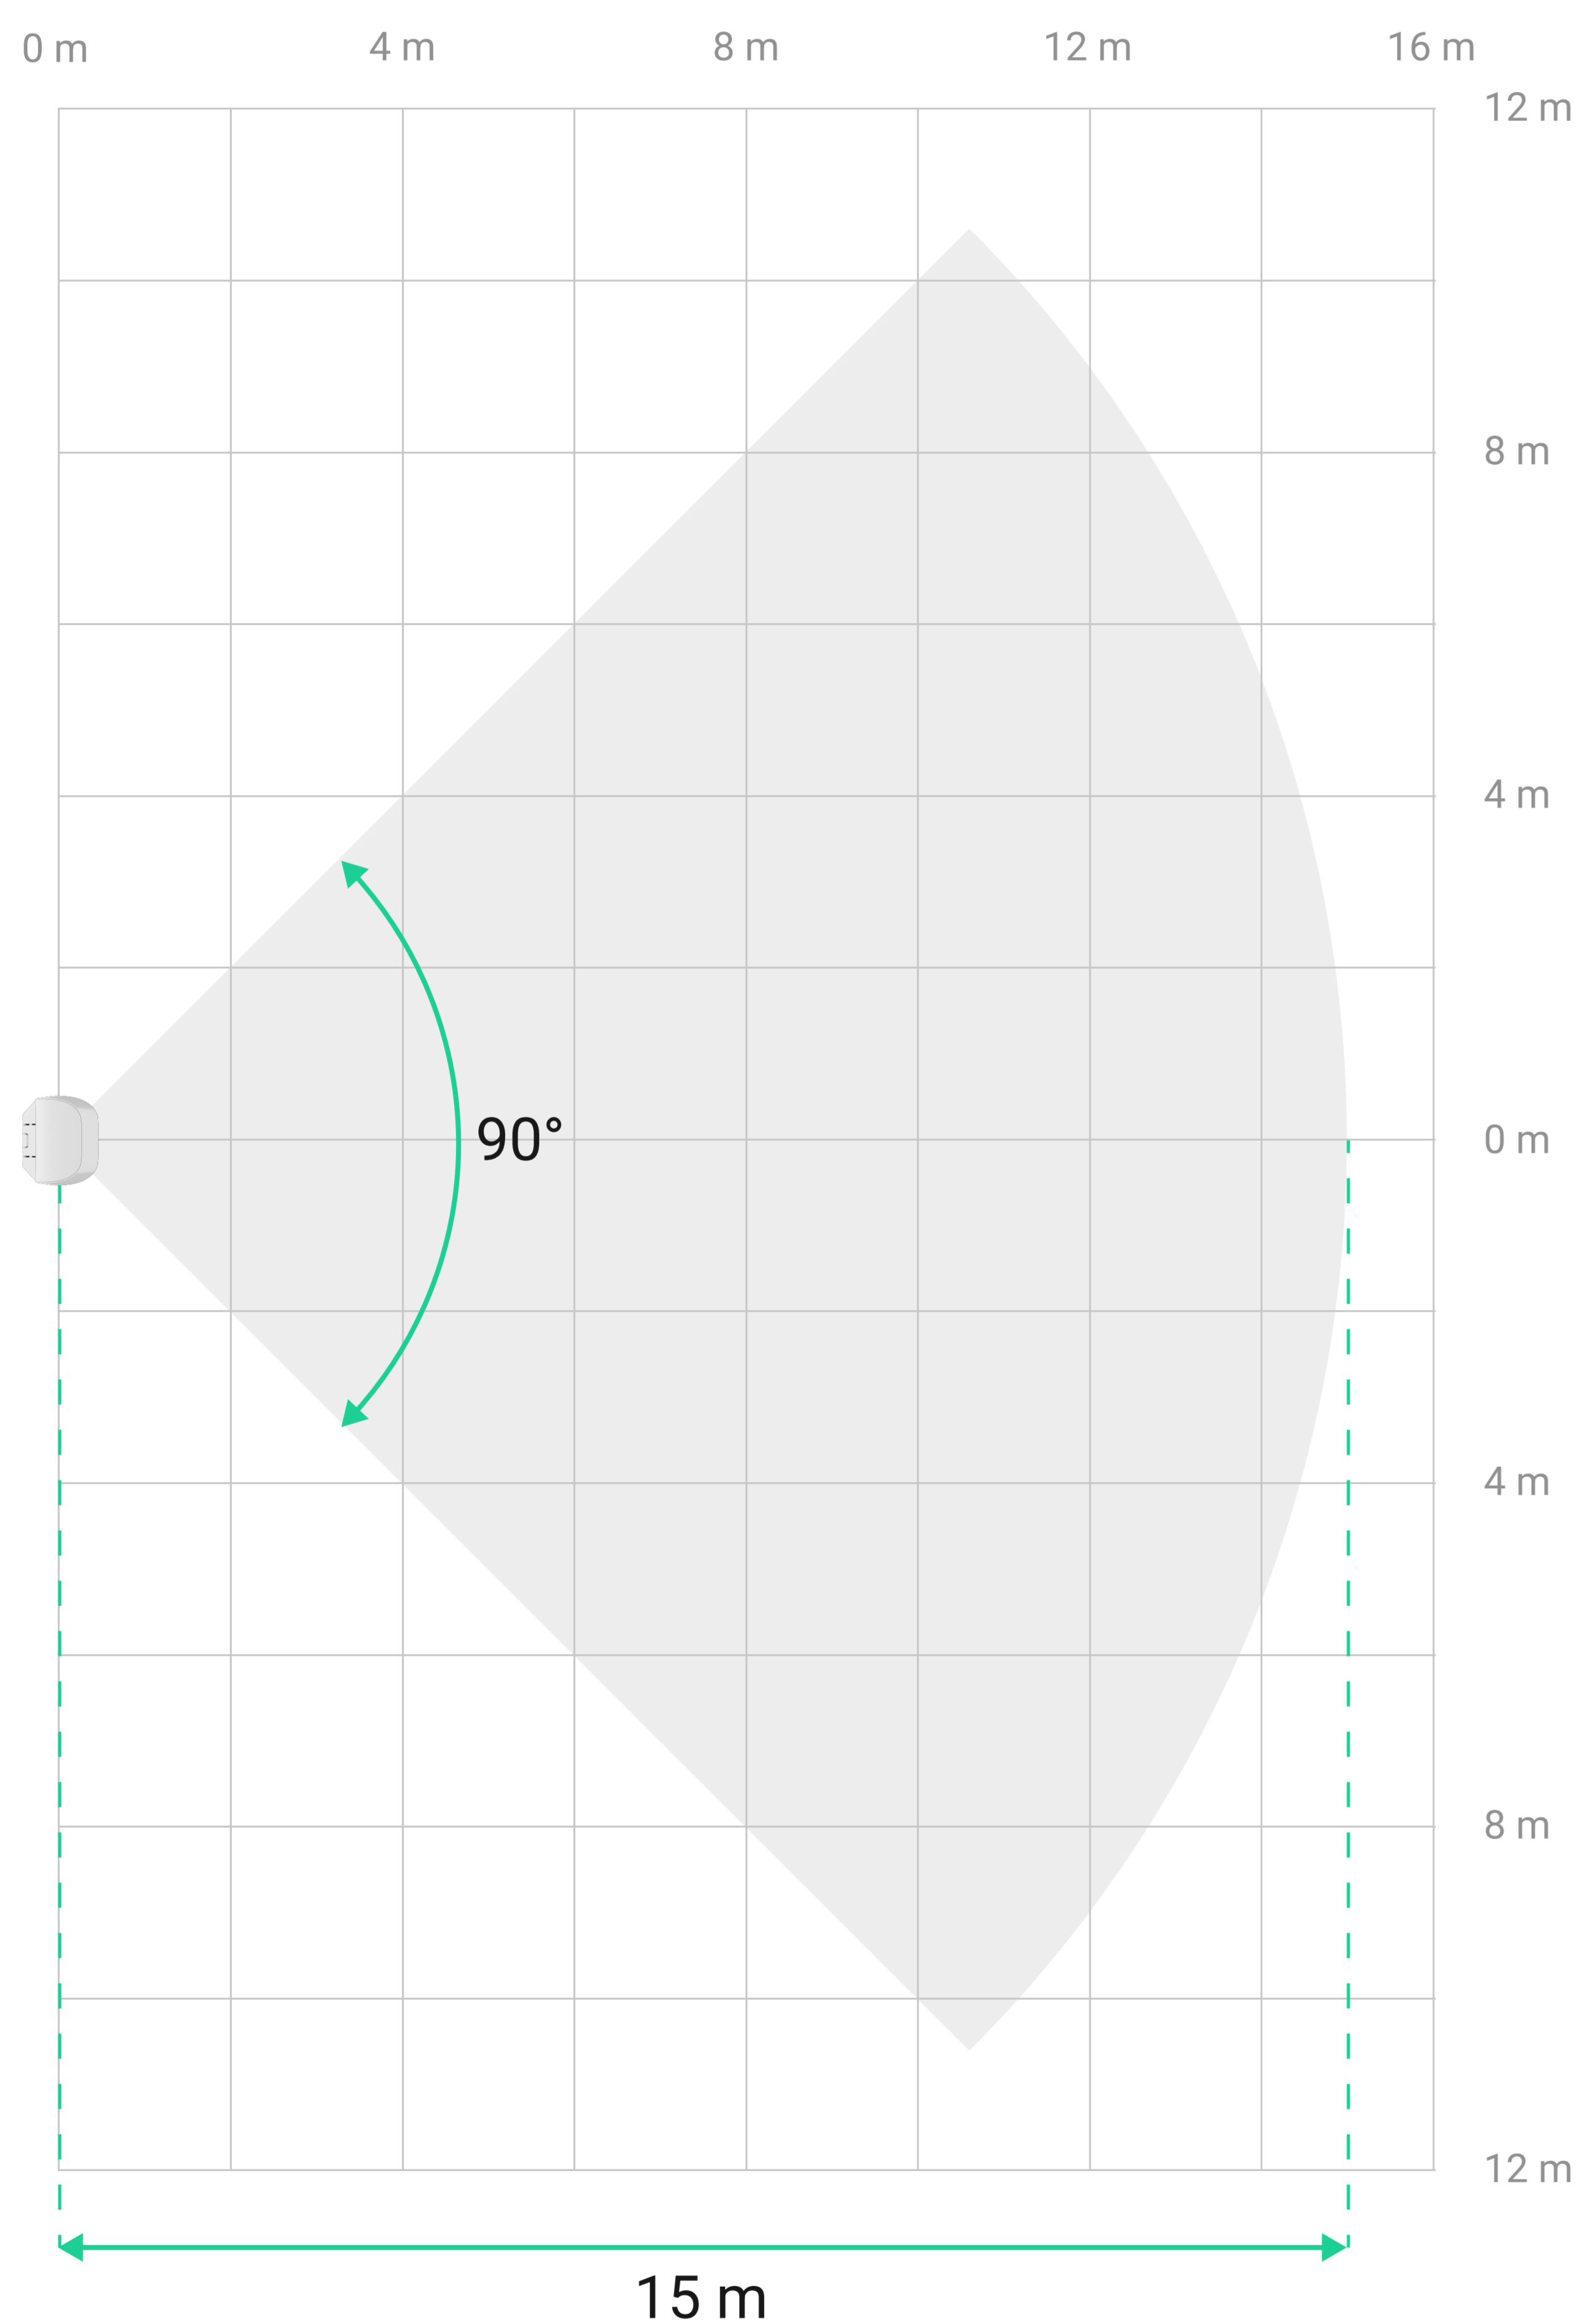


Enhanced motion detection

- Detection distance of up to 15 m (49 ft)
- Reduced blind zone with detecting a crawling person at a distance of up to 50 cm (1.6 ft) between the detector and the person
- Focusing IR radiation on a PIR sensor by a proprietary mirror system



False alarm prevention


- Dual motion detection technology
- K-band microwave sensor prevents false alarms caused by IR interference
- SmartDetect software algorithm instantly identifies false alarm markers



Fibra


communication technology

- Up to 2,000 m (6,550 ft) of two-way encrypted communication
- Device authentication to prevent forgery
- Data encryption against spoofing
- Polling to display device status in real time




System supervision

- Self-test of all sensitive elements to ensure the device is functioning properly
- Instant reporting of any malfunctions and connection losses to PROs and users



Sabotage and masking resistance


- Three tamper buttons
- Protection against short circuits
- Connection loss detection
- All types of masking required by Grade 3 are detected, including hindering, covering, and painting the lens



Effortless installation and configuration

- Pairing with a hub via Fibra line scanning or a QR code
- Remote configuration via a smartphone or desktop app
- Installation and replacement without disassembling the enclosure

Superior MotionProtect Plus G3 Fibra does not have a pet immunity feature.

<p>Compliance with standards</p> <p>EN 50131 (Grade 3) PD 6662:2017 INCERT SSF (in progress)</p> <p>Compatibility with hubs</p>  <p>For detailed information, scan the QR code or follow the link: ajax.systems/tools/devices-compatibility/?models=MP.G3.F</p>	<p>Communication with a hub</p> <p>Fibra communication technology</p> <p>Wired connection U/UTP cat.5 4x2x0.51 mm (24 AWG) cable, copper conductor</p> <p>4x0.22 mm² signal cable, copper conductor</p> <p>Communication range up to 2,000 m up to 6,550 ft With a U/UTP cat.5 4x2x0.51 mm (24 AWG) cable</p>	<p>Motion detection</p> <p>Sensitive elements 1 x PIR sensor 1 x K-band microwave sensor</p> <p>Operation frequency 24 GHz</p> <p>Motion detection distance from 0.5 to 15 m from 1.6 to 49 ft When installed at a height of 2.4 m (7.9 ft)</p> <p>Motion detection angles vertical: 71° horizontal: 90°</p> <p>Motion detection speed from 0.1 to 4 m/s from 0.3 to 13.1 ft/s</p>	<p>Power supply</p> <p>Fibra line 7-30 V^{DC}, up to 90 mW</p> <p>The hub or a Superior LineSupply Fibra module powers the detector.</p>
<p>Enclosure</p> <p>Color white, black</p> <p>Dimensions 120 x 62 x 52 mm 4.72" x 2.44" x 2.05"</p> <p>Weight 156 g</p> <p>Protection class IP30</p>	<p>Installation</p> <p>Operating temperature range from -10 °C to +40 °C from 14 °F to 104 °F</p> <p>Operating humidity up to 75%</p> <p>Installation height 2.4 m 7.9 ft</p>	<p>Complete set</p> <p>Superior MotionProtect Plus G3 Fibra</p> <p>SmartBracket mounting panel</p> <p>Installation kit</p> <p>Quick start guide</p>	



For detailed information, scan the QR code or follow the link:

ajax.systems/support/devices/superior-motionprotect-plus-g3-fibra/



support@ajax.systems



@AjaxSystemsSupport_Bot



ajax.systems