
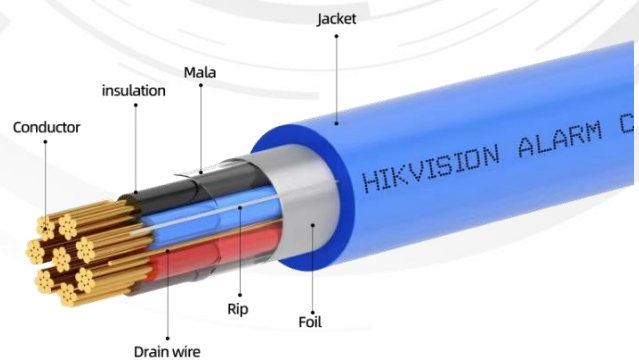


## DS-1AC2C6APL1

### Alarm Cable $2 \times 0.75\text{mm}^2 + 6 \times 0.22\text{mm}^2$

#### Key Feature

- Suitable for high-rise office buildings, hospitals, entertainment venues hotels, guest houses and other buildings.
- Used for wiring of fire alarms, smoke detectors, voice communications, anti-theft alarms, and fire circuit protection.
- Bare stranded copper conductor with less resistance, and better electrical properties and transmission performance.
- Jacket with strong mechanical properties, and high tensile and compressive strength, reducing damage during the project.
- Smooth appearance, reel in box, easy to pull.
- Flame retardant, compliant with EN50575.
- Continuous operation at  $-20$  to  $70^\circ\text{C}$ .
- Compliant with RoHS 2.0.

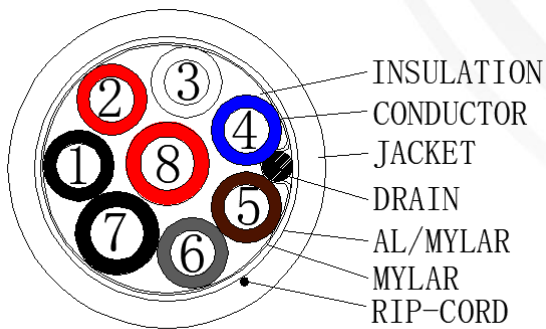

## Specification

Model	DS-1AC2C6APL1	
Category	Alarm Cable 2x0.75mm <sup>2</sup> +6x0.22mm <sup>2</sup>	
Reference standard	EN50575, CEI 46-76, CEI UNEL 36762, RoHS 2.0	
Fire resistance	CPR Eca	
Conductor 1 (0.22mm <sup>2</sup> )	Material	Bare Stranded Copper (99.95%)
	Conductor	7/(0.185± 0.007) mm 25AWG
Insulation 1 (0.22mm <sup>2</sup> )	Material	LSZH
	Thickness	0.2 mm
	Diameter	1.15± 0.10 mm
Conductor 2 (0.75mm <sup>2</sup> )	Material	Bare Stranded Copper (99.95%)
	Conductor	24/(0.185± 0.007) mm 19AWG
Insulation 2 (0.75mm <sup>2</sup> )	Material	LSZH
	Thickness	0.2 mm
	Diameter	1.60± 0.10 mm
Shield	Drain wire + Aluminum foil	
Drain	Material	Bare Stranded Copper (99.95%)
	Conductor	7/(0.185± 0.007) mm 25AWG
Jacket	Thickness	0.50 mm
	Diameter	5.20 ± 0.50 mm
	Material	LSZH
	Color	Blue
Rip-cord	Yes, Nylon	
Jacket physical properties	Tensile strength	≥ 10 Mpa
	Elongation	≥ 150%
	Cold bend	-20 ± 2°C × 4h, 8 × cable O.D, no visible cracks
Electrical Characteristics (20°C)	DC resistance	≤ 95 Ω/Km(0.22mm <sup>2</sup> ) ≤ 29 Ω/Km(0.75mm <sup>2</sup> )
	DC conductor resistance unbalance	≤ 4.0%
	Operating voltage	300 V
Environmental Specifications	Ambient temperature	-20°C to 70°C
Packaging and Weights	Package dimension	328mm×286mm×330mm
	Weight	17.90±2.00kg
	Cable length	(305 ± 1.5) m

## Available Model

DS-1AC2C6APL1

Model Number	Products(mm <sup>2</sup> )	Jacket Dia.(mm)	Jacket material	Fire resistance
DS-1AC2C6APL1	2×0.75+6×0.22	5.20	LSZH	CPR Eca

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq