

DS-D5222F2-1V1S 21.45 VA 75 Hz Monitor



- Ultra-thin device body with ultra-thin border for 3 sides.
- 8 bit LVDS FHD (1920 × 1080) display.
- 178° ultra-wide view screen.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Support VESA wall mount.
- Built-in speaker for audio input.

▪ Specification

Display	
Screen Size	21.45 inch
Active Display Area	478.656 (H) mm × 260.280 (V) mm
Resolution	1920 × 1080
Backlight	E-LED
Pixel Pitch	0.241 (H) mm × 0.241 (V) mm
Brightness	250 cd/m ²
Viewing Angle	178° (H)/178° (V)
Color Depth	8 bit, 16.7 M
Contrast Ratio	3000:1
Response Time	6.5 ms
Refresh Rate	Max. 75 Hz, Typ. 60 Hz
Haze	Haze 25%, 3H
Reliability	7 × 24 H
Color Gamut	72% NTSC
Interface	
Video & Audio Input	HDMI 1.4 × 1, VGA × 1, CVBS × 1, AUDIO IN × 1
Video & Audio Output	Speaker (2 W 8 Ω) × 2
Data Transmission Interface	USB 2.0 (support program upgrade and USB online playback) × 1
Power	
Power Supply	AC 100 to 240 V ~ , 50/60 Hz, 0.5 A Max
Power Consumption	≤ 25 W
Standby Consumption	≤ 0.5 W
Working Environment	
Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
Working Humidity	10% RH to 80% RH (Non-Condensing)
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Storage Humidity	5% RH to 90% RH (Non-Condensing)
General	
Casing Material	Plastic
VESA	75 mm × 75 mm (4 - M4 × 6 mm)
Bezel Width	1.89 mm (top/left/right), 22.55 mm (bottom)
Product Dimensions (W × H × D)	without stand: 492.36 (W) mm × 289.68 (H) mm × 41.88 (D) mm (19.38" × 11.4" × 1.65") with stand: 492.36 (W) mm × 403.93 (H) mm × 209.99 (D) mm (19.38" × 15.9" × 8.27")
Package Dimensions (W × H × D)	600 (W) mm × 400 (H) mm × 115 (D) mm (23.62" × 15.75" × 4.53")
Net Weight	2.65 ± 0.5 kg (5.84 ± 1.10 lb)
Gross Weight	3.9 ± 0.5 kg (8.60 ± 1.10 lb)
Packing List	Monitor × 1, Base component × 1, AC power cable (1.5 m) × 1, HDMI cable (1.5 m) × 1, User manual × 1, Multilingual manual × 1
Remarks	The base is included by default. The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information

▪ **Physical Interface**


Interface	Description	Interface	Description
VGA	VGA Analog Signal Input Interface	CVBS	CVBS Signal Input Interface
HDMI	HDMI 1.4 Digital Signal Input Interface	USB	USB 2.0 Signal Input Interface
Audio IN	Audio Input Interface	AC	AC 100 to 240 VAC Power Input



▪ **Available Model**

DS-D5222F2-1V1S

▪ **Dimension**

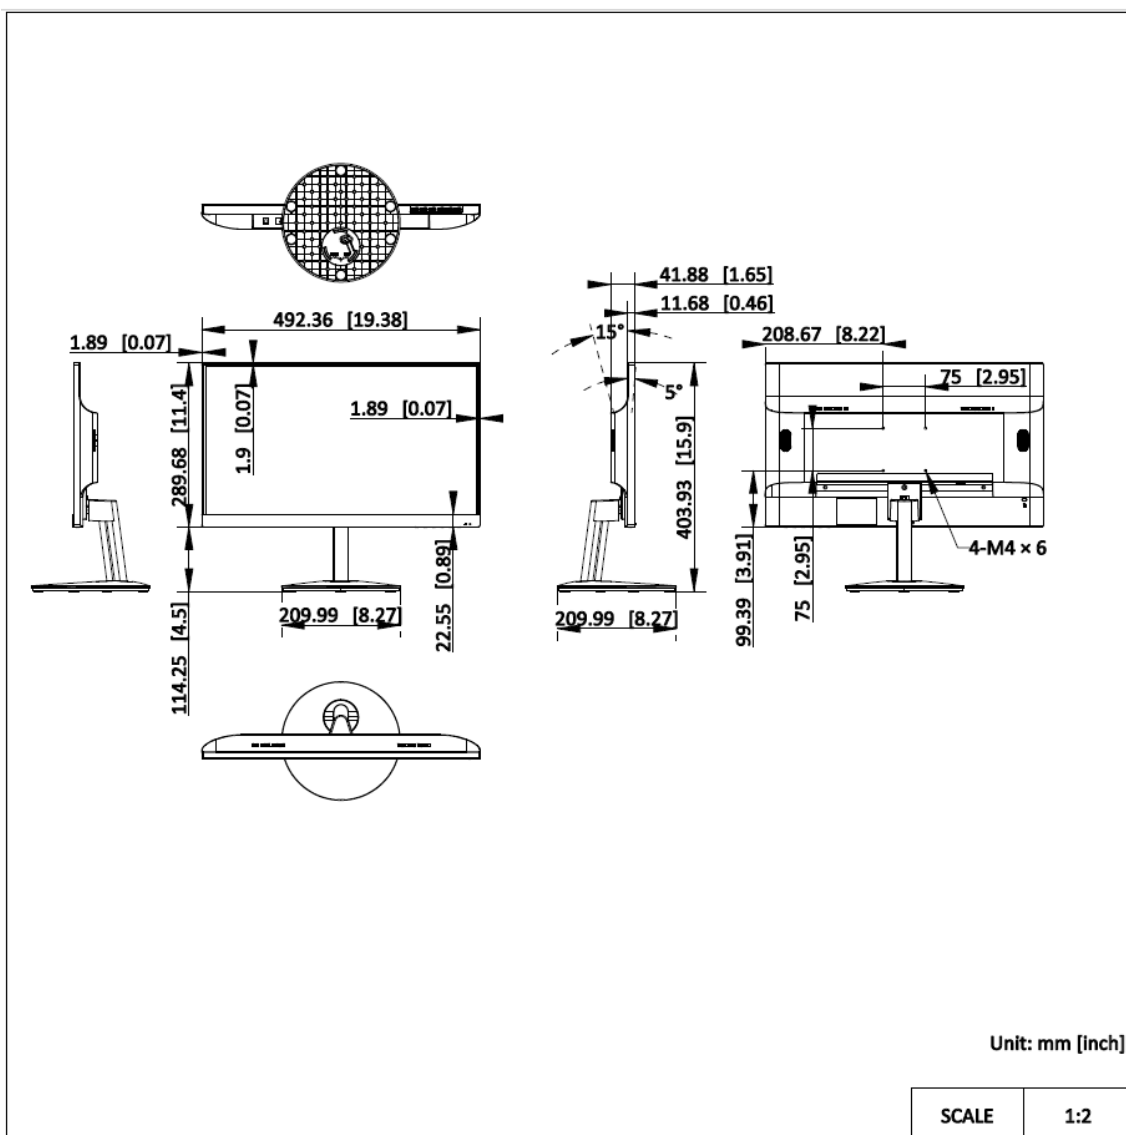

- **Accessory**
- **Optional**

DS-DM1940W
Wall-mounted Bracket

**Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq