

## DS-1100KI(B) Network Keyboard

Hikvision DS-1100KI(B) network keyboard adopts 7" touchscreen and 4D joystick. It supports accessing Hikvision DVR, DVS, NVR, decoder, MVC, network camera, network speed dome, HikCentral and KPS platforms via network. It can be applied to industries like financial, education, communication, public security industries.



### Available Model

DS-1100KI(B)

### Key Feature

#### Video Wall Operation

- Divide video wall into regions to manage video wall by region
- open/close window, move window, resize window, divide window, and enlarge/narrow sub-window.
- Group and macro

#### Live View

- Preview camera live image on network keyboard touchscreen
- Quickly switch to the previous/next camera

#### PTZ Control

- Control speed dome movement via joystick

#### Playback

- Play the decoder videos on video wall
- Play the video recorder videos on network keyboard touchscreen. Supports clipping and capturing during playback

#### Integration

- Add devices via SDK or ONVIF protocol
- HikCentral and KPS platforms access

#### Capability


- Support up to 32 users (1 administrator and 31 operators) and 4,000 devices
- Add/modify/delete cameras in batch
- Import/export configuration file




## Specification

Model		DS-1100KI(B)
Local Decoding	Format	H.264, H.265, MPEG4
	Performance	4@1080p
	Screen division	Single screen
Input/output	Display	7" TFT LCD at 1024 × 600 resolution
	Joystick	4D joystick
	Audio	1 video input and 1 video output of 3.5 mm audio jack. Supports two-way audio
	Video	Not supported
	USB	1 × USB 2.0 interface
	Serial port	1 × RS-232, 1 × RS-485
	Network	1 × 100M/1000M self-adaptive network interface
General	System	Linux
	Dimensions (L × W × H)	435 × 193 × 110 mm (17.1" × 7.6" × 4.3")
	Weight	2 KG (4.4 lb)
	Working temperature	-10 °C to +55 °C (14 °F to 131 °F)
	Working Humidity	10% to 90%
	Power supply	12 VDC
	Consumption	≤ 15 W

## Dimension

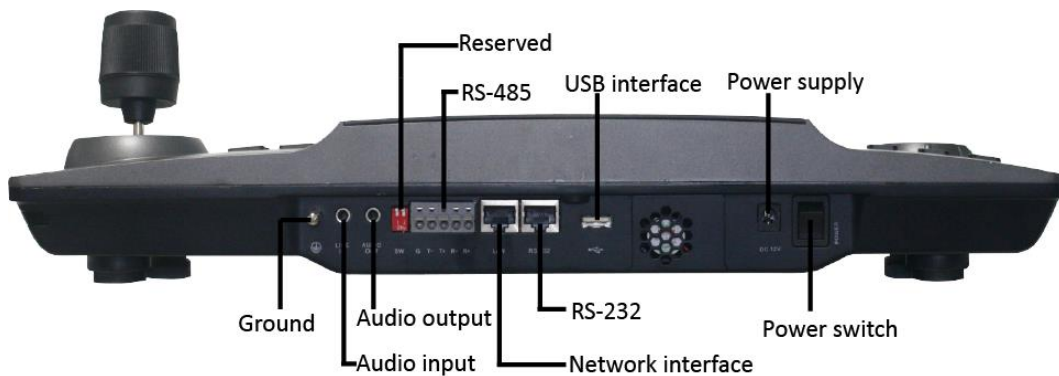

## Typical Application

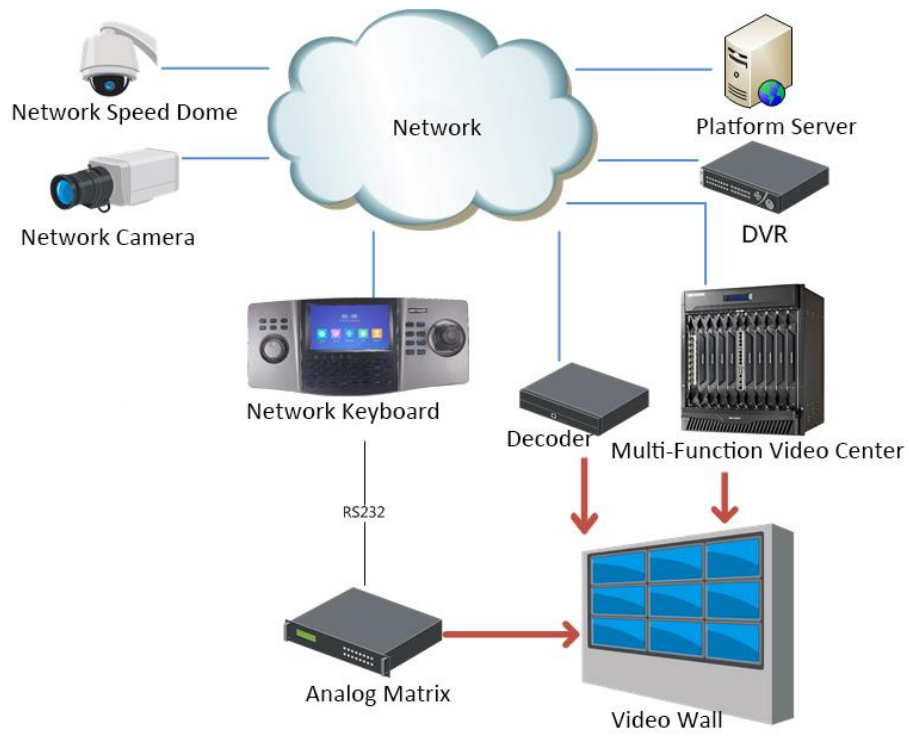

Distributed by

