


DHI-KTX01-A

Video Intercom KIT

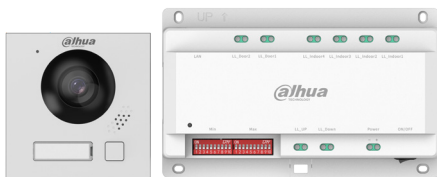

Technical Specification

System(VTO)

Main Processor	Embedded Processor
Operating System	Embedded Linux OS
Button Type	Mechanical

Basic(VTO)

Camera	1/2.5" 2 MP CMOS low illumination HD color fisheye camera
Field of View	H: 168.6°; V: 87.1°; D: 176.7°
WDR	120 dB
Noise Reduction	3D NR
Video Resolution	P: 960 (H) × 576 (V) N: 960 (H) × 480 (V)
Video Frame Rate	P: 25 fps N: 30 fps
Light Compensation	Auto IR
Day/Night	Auto(ICR)/Color/B/W
Audio Input	1 channel
Audio Output	Built-in speaker
Audio Mode	Two-way audio (half-duplex)
Audio Enhancement	Echo suppression/digital noise reduction
Audio Output	Built-in speaker
Audio Mode	Two-way audio (half-duplex)
Audio Enhancement	Echo suppression/digital noise reduction

Function(VTO)

Communication Mode	Analog 2-wire
--------------------	---------------

- Anodized aluminum front panel.
- Includes a 2MP HD CMOS low-illumination color 160° fisheye camera.
- Supports 2-wire communication.
- Offers video intercom, which can be used to communicate with the VTH.
- Connects to various modules making it easy to expand.
- Supports surface and flush mount.
- IK07 and IP65 rated.
- Includes four 2-wire ports for connecting to the VTH and two 2-wire ports for the VTO.
- You can cascade 10 devices.
- Supports connecting to 100 analog VTHs or 22 hybrid VTHs.
- Includes an RJ-45 port and supports accessing the device webpage to perform system configuration and management.
- Supports guide rail mount.



Verification Method	Password; Fingerprint; Remote; IC card; ID card
Leave Videos	Yes (SD card inserted in VTH is needed)

Performance(VTO)

Casing Material	Aluminum alloy
-----------------	----------------

Port(VTO)

RS-485	1
Alarm Output	1 channel
Power Output	1 port (12 V, 1 A)
Exit Button	1 channel
Door Status Detection	1 channel
Lock Control	1 channel

Alarm(VTO)

Tamper Alarm	Yes
--------------	-----

General(VTO)

Appearance Color	Silver
Power Supply	2-wire controller
Installation	Flush Mount; Surface Mount
Certifications	CE
Accessory	Surface mount box (optional), flush mount box (optional), panel (optional)

Product Dimensions	100 mm × 100 mm × 47.35 mm (3.94" × 3.94" × 1.86") (H × W × D)
Protection	IK07; IP65
Operating Temperature	−40 °C to +60 °C (−40 °F to +140 °F)
Operating Humidity	10%–90%
Operating Altitude	0 m–3,000 m (0 ft–9,842.52 ft)
Operating Environment	Outdoor
Power Consumption	≤4 W (standby), ≤12 W (working)
Gross Weight	435 g (0.96 lb)

System(VTNC)

Main Processor	Embedded Processor
Operating System	Embedded Linux OS
Network Protocol	IPv4; UDP; DNS; TCP; SSH

Function(VTNC)

Communication Mode	Analog 2-wire
Web Configuration	Yes

Performance(VTNC)

Casing Material	PC + ABS
-----------------	----------

Port(VTNC)

Network Port	1 × 100 Mbps Ethernet port
--------------	----------------------------

General(VTNC)

Appearance Color	White
Power Supply	48–53 VDC, 4 A
Installation	Guide Rail Mount
Certifications	CE
Product Dimensions	117 mm × 191 mm × 38 mm (4.61" × 7.52" × 1.50") (L × W × H)
Operating Temperature	−10 °C to +55 °C (+14 °F to +131 °F)
Operating Humidity	10%–95%, non-condensing
Operating Altitude	0 m–3,000 m (0 ft–9,842.52 ft))
Operating Environment	Indoor
Power Consumption	≤4 W (standby), ≤100 W (working)
Gross Weight	647.5 g (1.43 lb)



Ordering Information

Type	Model	Description
Modules	DHI-VTO4103F-1	Camera module
	DHI-VTNC2113C	2-wire Controller
	DHI-VTO4103F-MB1	One-button module
	DHI-VTO4103FB-MB1	One-button module(Black)
	DHI-VTO4103F-MB2	Two-button module
	DHI-VTO4103FB-MB2	Two-button module(Black)
	DHI-VTO4103F-MB5	Five-button module
	DHI-VTO4103FB-MB5	Five-button module(Black)
	DHI-VTO4103F-ML	Indicator module
	DHI-VTO4103FB-ML	Indicator module(Black)
	DHI-VTO4103F-MK	Keyboard module
	DHI-VTO4103FB-MK	Keyboard module(Black)
	DHI-VTO4103F-MF	Fingerprint module
	DHI-VTO4103FB-MF	Fingerprint module(Black)
	DHI-VTO4103F-MR	Card swiping module(IC)
	DHI-VTO4103FB-MR	Card swiping module(IC)(Black)
	DHI-VTO4103F-MR1	Card swiping module(ID)
	DHI-VTO4103FB-MR1	Card swiping module(ID)(Black)
	DHI-VTO4103F-MI	Info module
	DHI-VTO4103FB-MI	Info module(Black)
	DHI-VTO4103F-MN	Blank module
	DHI-VTO4103FB-MN	Blank module(Black)


Accessories	VTM125	Front panel for 2 modules
	VTM126	Front panel for 3 modules
	VTM25P2	Front panel for 2 modules(Black)
	VTM24P3	Front panel for 3 modules(Black)
	VTM77	Front panel for 1 module
	VTM78	Front panel for 1 module(Black)
	VTM52R2	Vertical two modules, surface mounted rain cover
	VTM53R3	Vertical three module, surface mounted rain cover
	VTM54R4	Vertical two*2 modules in parallel, surface mounted rain cover
	VTM56R6	Vertical two*3 modules in parallel, surface mounted rain cover
	VTM51R2	Vertical two modules with vertical rod, the cable goes out, It has the function of receiving the cable
	VTM61R2	Vertical two modules with vertical extended rod, the cable goes out, It has the function of receiving the cable
	VTM26R2	Vertical two modules, surface mounted rain cover(Black)
	VTM27R3	Vertical three module, surface mounted rain cover(Black)
	VTM28R4	Vertical two*2 modules in parallel, surface mounted rain cover(Black)
	VTM29R6	Vertical two*3 modules in parallel, surface mounted rain cover(Black)
	VTM30R2	Vertical two modules with vertical rod, the cable goes out, It has the function of receiving the cable(Black)
	VTM75	Vertical one module, surface mounted rain cover
	VTM76	Vertical one module, surface mounted rain cover(Black)
	VTM127	Mounting box for 2 modules
	VTM128	Mounting box for 3 modules
	VTM79	Mounting box for 1 module

Installation

1-module, Surface	1-module, Flush
Rain Cover: VTM75, VTM76(Black) Panel: VTM77, VTM78(Black)	Box: VTM79 Panel: VTM77, VTM78(Black)
2-module, Surface	2-module, Flush
Rain Cover: VTM52R2, VTM26R2(Black) Panel: VTM125, VTM25P2(Black)	Box: VTM127 Panel: VTM125, VTM25P2(Black)
2-module, Vertical rod	3-module, Surface
Vertical rod: VTM51R2. VTM61R2(Extended), VTM30R2(Black) Panel: VTM125, VTM25P2(Black)	Rain Cover: VTM53R3, VTM27R3(Black) Panel: VTM126, VTM24P3(Black)
3-module, Flush	2 * 2-module, Surface
Box: VTM128 Panel: VTM126, VTM24P3(Black)	Rain Cover: VTM54R4, VTM28R4(Black) Panel: VTM125*2, VTM25P2(Black)*2
2 * 3-module, Surface	
Rain Cover: VTM56R6, VTM29R6(Black) Panel: VTM126*2, VTM24P3(Black)*2	



Dimensions (mm[inch])

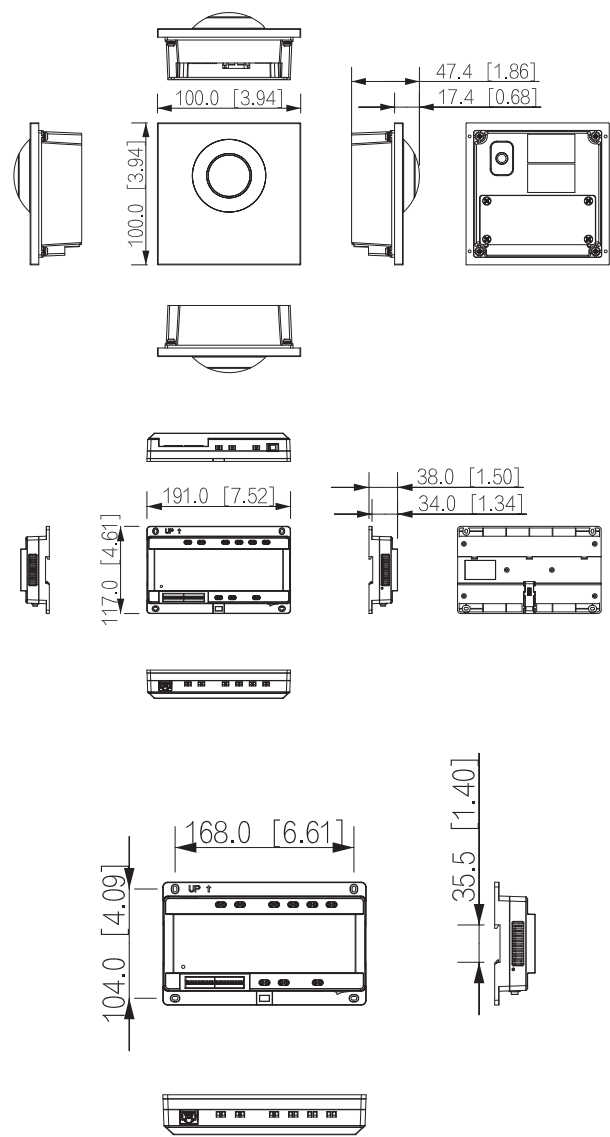

Application

