



An Intel® i5 OPS slot PC with Windows® 11 which supports 5K (5120x2160) resolution

This mini OPS PC with Intel® Core™ i5 inside turns your iiyama (interactive) large format display into a stand-alone solution. It comes equipped with a powerful Intel® processor with integrated Ultra HD graphics and a fast SSD drive. No hassle with cables and having to mount a PC at the back of the monitor or on a floor lift. The OPC51204BC-1 is also very quiet with a noise level below 34dB at 100% CPU load at 1 meter distance. Simply slide in the iiyama OPS slot PC and get started right away.

01 DEVICE

| | |
|---------------------|--|
| Type | OPS slot PC |
| CPU | Intel® Core™ i5-12450H (12th Gen), TPM 2.0 (Trusted Platform Module) |
| RAM | DDR4 3200MHz 8GB, Max. 32GB |
| SSD | PCIe 256GB M.2 |
| Graphics | Integrated Intel® UHD Graphics for 12th Gen Intel® Processors |
| Chipset | Intel® |
| Sound card | Integrated High Definition 100B Audio Stereo |
| Network | 10/100/1000M Adapter |
| WiFi | 802.11 a/b/g/n/ac/ax (Wifi 6) |
| Bluetooth | 5.2 |
| Operating system | Windows 11 IoT Enterprise |
| LAN (RJ45) | x1 |
| USB | 3.0 x4, 3.2 (Type C) x1 (Not support DP Alt mode) |
| DisplayPort Out | x1, DP1.4 (Max resolution 3840 x 2160 60Hz) |
| HDMI Out | x1, HDMI2.0 (Max resolution 3840 x 2160 60Hz) |
| Headphone connector | yes |
| Microphone In | x1 |
| Audio | 1x Audio out |

02 POWER MANAGEMENT


| | |
|-------------|------------------------------|
| Power usage | 80.7W typical, 2.9W stand by |
|-------------|------------------------------|

03 DIMENSIONS / WEIGHT

| | |
|------------------------------|------------------|
| Product dimensions L x W x H | 180 x 119 x 30mm |
| Box dimensions W x H x D | 260 x 192 x 72mm |
| Weight (without box) | 0.60kg |
| Weight (with box) | 0.957kg |
| EAN code | 4948570033331 |

04 ENVIRONMENTAL CONDITIONS

| | |
|-----------------------------|---------------|
| Operation temperature range | 0°C - 45°C |
| Operation humidity | 10% - 95% |
| Storage temperature range | - 10°C - 50°C |
| Storage humidity | 10% - 95% |

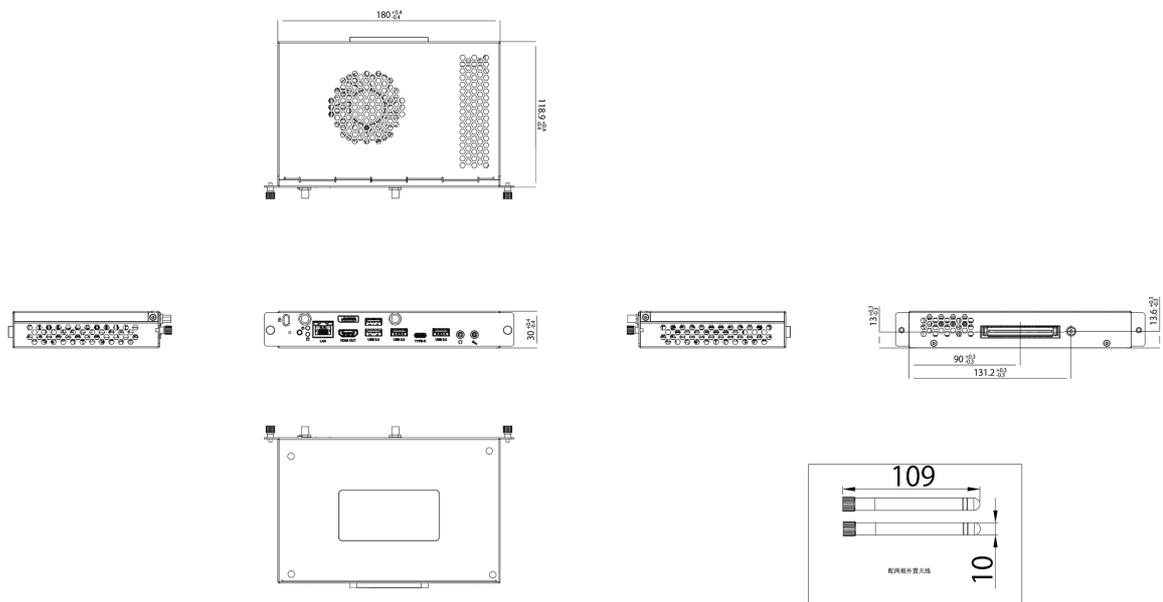

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IYAMA CORPORATION. ALL RIGHTS RESERVED