


CODE: **AWO003 v.1.5/IV**
 NAME: **7/TRP20/PAR**

EN

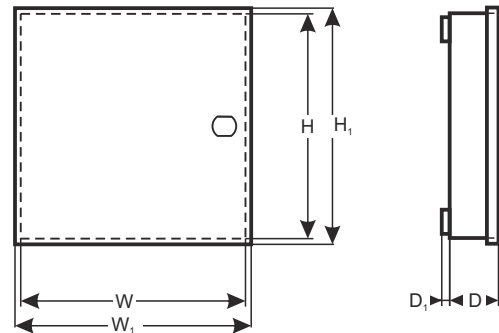

DESTINATION

PARADOX

- 1) MG5050
- 2) (728 ULT, E55, E65, MG5000) + PS817
- 3) SP4000, 5500, 6000

MODULES:

- 1) (2 x ZX8, PGM4) + PS817
- 2) (ACM12, APR3-ADM2, PS17) + PS817
- 3) APR3- HUB2 + ZX8(PGM4) + PS817

TECHNICAL DATA

External dimensions of the enclosure:	W=250, H=250, D+D1=80+8 [±2 mm]
External dimensions of the front panel:	W1=255, H1=255 [±2 mm]
Battery space:	7 Ah /12 V Sealed Lead Acid (SLA)
Weight net/gross:	2,25 / 2,40 [kg]
Transformer:	TRP 20 VA/16 V/18 V in the case of PC/ABC in class UL94-V0, IP30
Power supply:	230 V(-15%/+10%); 50 Hz, 120mA (max.)
Power supply output:	U1=16 V AC or U2=18 V AC (-5%, +15%), I1=2,2 A or I2=2,0 A (max.)
Operating environment:	class II, -10°C+ 40°C
Material description:	sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003
Destination:	indoor
Tamper protection:	1 x microswitch: opening, wall tamper 0,5 A ;50 V DC max. NC - normally closed contacts
Closing:	sheet-metal screws x 4
Notes:	optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal, holes for MAGELLAN (antennas)
Declaration, warranty:	CE, 2 year from the production date