


# VTNA1043A

## Branch Terminal




- Includes 1 input port and 4 output ports.
- Suppresses signal reflection and improves the ability of the bus to resist interference.

### **E**\CH


#### **Technical Specification** Performance PC + ABS Casing Material General White Appearance Color Certifications CE Accessory 46.3 mm $\times$ 65.3 mm $\times$ 23.1 mm (1.82" $\times$ 2.57" $\times$ **Product Dimensions** Operating Temperature $-10~^{\circ}\text{C}$ to +55 $^{\circ}\text{C}$ (+14 $^{\circ}\text{F}$ to +131 $^{\circ}\text{F})$ Operating Humidity 10%-95%, non-condensing Operating Environment Indoor Operating Altitude 0-3000 m (0-9842.52 ft) Gross Weight 100 g (0.22 lb) 0 °C to +40 °C (+32 °F to +104 °F) Storage Temperature 30%-75% Storage Humidity

Ordering Information		
Туре	Model	Description
VTNA	VTNA1043A	Branch Terminal

#### Dimensions (mm[inch])

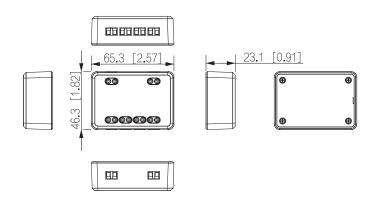

#### **Application**



Rev 002.000