

DS-7708NI-I4/8P NVR

Key Feature

- H.265+/H.265/H.264+/H.264 video formats
- Up to 8-ch IP camera inputs
- Up to 2-ch@12 MP/16-ch@1080p decoding capacity
- Up to 80 Mbps incoming bandwidth



Professional and Reliability

- H.265+ compression effectively reduces the storage space by up to 75%
- Dual-stream recording saves bandwidth
- Adopt stream over TLS encryption technology which provides more secure stream transmission service
- Support double verification for playback and downloading

HD Video Output

- Provide independent HDMI and VGA outputs
- HDMI video output at up to 4K resolution

Storage and Playback

- Up to 4 SATA interfaces for HDD connection
- 8-ch synchronous playback

Smart & POS Function

- Support multiple VCA (Video Content Analytics) events
- Configurable special camera smart functions, such as VCA detection (motion, line crossing, intrusion, etc.), heat map, ANPR, and people counting
- POS information overlay on live view and playback, and POS triggered recording and alarm

Network & Ethernet Access


- 8 independent PoE network interfaces
- 1 self-adaptive 10/100/1000 Mbps Ethernet interface
- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- Smooth streaming technology
- Support web access without plug-in

Specification

Model	DS-7708NI-I4/8P
Video and Audio	
IP video input	8-ch Up to 12 MP resolution
Incoming bandwidth	80 Mbps
Outgoing bandwidth	256 Mbps
HDMI output	4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
VGA output	1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
Video output mode	HDMI/VGA independent output
CVBS output (optional)	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
Audio output	1-ch, RCA (Linear, 1 KΩ)
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ, using the audio input)
Decoding	
Decoding format	H.265+/H.265/H.264+/H.264/MPEG4
Recording resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA /4CIF/DCIF/2CIF/CIF/QCIF
Synchronous playback	8-ch
Capability	2-ch@12 MP (20 fps)/4-ch@8 MP (25 fps)/8-ch@4 MP (30 fps)/16-ch@1080p (30 fps)
Dual stream recording	Support
Stream type	Video, Video & Audio
Audio compression	G.711ulaw/G.711alaw/G.722/G.726
Network	
Remote connections	64
Network protocol	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS
Network interface	1, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
PoE	
Interface	8, RJ-45 10/100 Mbps self-adaptive Ethernet interface
Power	≤ 200 W
Supported standard	IEEE 802.3 af/at
Auxiliary Interface	
Serial port	1 RS-485 (half-duplex), 1 RS-232
SATA	4 SATA interfaces
Capacity	Up to 10 TB capacity for each disk
Alarm in/out	16/4
USB interface	Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0
General	
Power supply	100 to 240 VAC, 50 to 60 Hz
Consumption (without HDD and PoE off)	≤ 20 W
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)


Working humidity	10% to 90%
Chassis	19-inch rack-mounted 1.5U chassis
Dimension (W × D × H)	445 × 400 × 75 mm (17.5"× 15.7" × 3.0")
Weight (without HDD)	≤ 5 kg (11 lb)
Certification	
FCC	Part 15 Subpart B, ANSI C63.4-2014
CE	EN 55032:2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4

Dimension

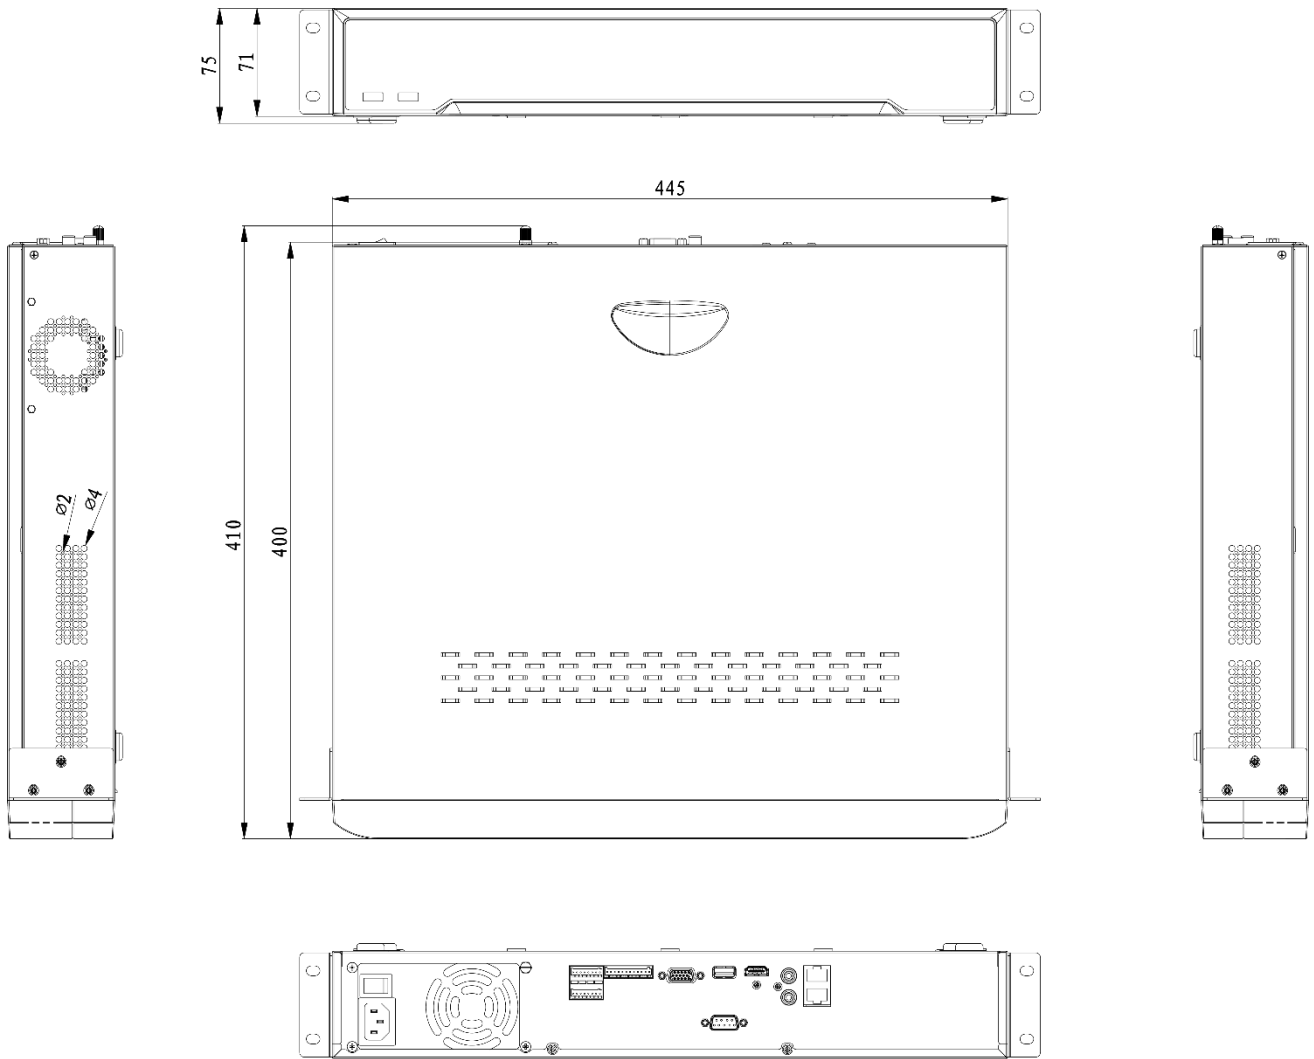

scale/1:1;Unit/mm

Physical Interface

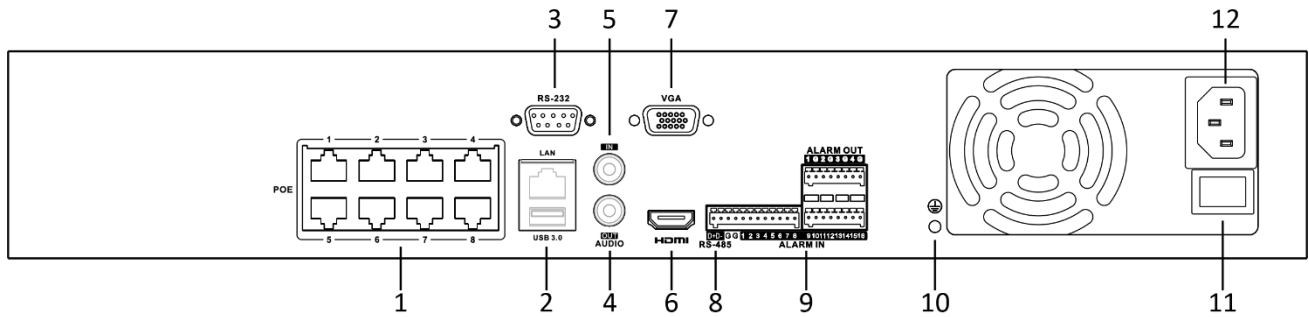

No.	Description	No.	Description
1	Network Interfaces with PoE function	7	VGA Output (DB9 Connector)
2	LAN and USB 3.0 Interfaces	8	RS-485 Interface
3	RS-232 Serial Interface	9	Alarm In/Out
4	AUDIO OUT	10	GND
5	AUDIO IN	11	Power Switch
6	HDMI Interface	12	100 to 240 VAC Power Supply

Available Model

DS-7708NI-I4/8P