

# DH-HAC-HDW1200T-Z-A-POC

## 2MP HDCVI POC Motorized Vari-focal IR Eyeball Camera



\* The parameters and datasheets below can only be applied to 1200-S5-POC series.

- Max 30 fps@1080P.
- 2.7mm-12mm motorized lens.
- CVI/CVBS/AHD/TVI switchable.
- Built-in mic.
- Max. IR length 60m, Smart IR.
- IP67, PoC (only CVI)/12V±30% DC.



### Series Overview

PoC Series features camera powered directly by the recorder over the same coaxial cable\* in which video is transmitted. Dahua PoC transmission distance can reach up to 200 meters for AF cameras and 100 meters for AT cameras, that can help decrease material and installation cost and simplify the system.

\* It is recommended to choose RG59/RG6 cable for PoC transmission.

### Functions

#### 4 Signals over 1 Coaxial Cable

HDCVI technology supports 4 signals to be transmitted over 1 coaxial cable simultaneously, i.e. video, audio\*, data and power. Dual-way data transmission allows the HDCVI camera to interact with the XVR, such as sending control signal or triggering alarm. Moreover, HDCVI technology supports PoC for construction flexibility.

\* Audio input is available for some models of HDCVI cameras.

#### Long Distance Transmission

HDCVI technology guarantees real-time transmission at long distance without any loss. It supports up to 700m transmission for 2MP/5MP/8MP HD video via coaxial cable, and up to 300m via UTP cable.

\*Actual results verified by real-scene testing in Dahua's test laboratory.

#### Simplicity

HDCVI technology inherits the born feature of simplicity from traditional analog surveillance system, making itself a best choice for investment protection. HDCVI system can seamlessly upgrade the traditional analog system without replacing existing coaxial cabling. The plug and play approach enables high definition video surveillance without the hassle of configuring a network.

### Smart Illumination

The camera is designed with IR illumination for best lowlight performance. Smart IR is a technology to ensure brightness uniformity in B/W image under low illumination. Dahua's unique Smart IR adjusts to the intensity of camera's infrared LEDs to compensate for the distance of an object, and prevents IR LEDs from overexposing images as the object come closer to the camera.

### Protection (IP67, wide voltage)

**IP67:** The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can works normal after soaking in 1 m deep water for 30 minutes.


**Wide voltage:** The camera allows ±30% (for some power supplies) input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.

### Broadcast-quality Audio

Audio information is used as supplementary evidence in video surveillance applications. The HDCVI camera supports audio signal transmission over coaxial cable. In addition, it adopts unique audio processing and transmission technology that best restores source audio and eliminates noise, guaranteeing the quality and effectiveness of collected audio information.


Technical Specification	
<b>Camera</b>	
Image Sensor	2MP CMOS
Max. Resolution	1920 (H) × 1080 (V)
Pixel	2MP
Scanning System	Progressive
Electronic Shutter Speed	PAL: 1/25 s–1/100,000 s NTSC: 1/30 s–1/100,000 s
S/N Ratio	> 65 dB
Min. Illumination	0.02 Lux/F1.7, 30IRE, 0 Lux IR on
Illumination Distance	60 m (196.9 ft)
Illuminator On/Off Control	Auto
Illuminator Number	2 (IR light)
Pan/Tilt/Rotation Range	Pan: 0°–360° Tilt: 0°–78° Rotation: 0°–360°
<b>Lens</b>	
Lens Type	Motorized Vari-focal
Auto Focus	N/A
Mount Type	φ14
Focal Length	2.7 mm–12 mm
Max. Aperture	F1.7
Field of View	Diagonal: 38°–125° Horizontal: 33°–102° Vertical: 19°–53°
Iris Type	Fixed
Close Focus Distance	1.2 m (3.9 ft)
DORI Distance	2.7 mm: D: 49.7 m (163.1 ft); O: 19.9 m (65.3 ft); R: 9.9 m (32.5 ft); I: 5 m (16.4 ft) 12 mm: D: 82.8 m (271.7 ft); O: 33.1 m (108.6 ft); R: 16.6 m (54.5 ft); I: 8.3 m (27.2 ft)
<b>Video</b>	
Frame Rate	CVI: 1080p@25/30fps; 720p@25/30fps; AHD: 1080p@25/30fps; 720p@25/30fps; TVI: 1080p@25/30fps; 720p@25/30fps; CVBS: 960H
Resolution	1080p (1920 × 1080); 720p (1280 × 720); 960H (960 × 576/960 × 480)
Day/Night	Auto switch by ICR
BLC	BLC/DWDR/HLC
White Balance	Auto/Area WB
Gain Control	Auto; manual
Noise Reduction	2D NR
Smart IR	Yes
Mirror	Yes
Privacy Masking	Off/On (8 area, rectangle)
<b>Certifications</b>	
Certifications	CE (EN55032, EN55024, EN50130-4) FCC (CFR 47 FCC Part 15 subpartB, ANSI C63.4-2014) UL (UL60950-1+CAN/CSA C22.2 No.60950-1)
<b>Port</b>	
Video Output	Video output choices of CVI/TVI/AHD/CVBS by one BNC port
Audio Input	One channel built-in mic
<b>Power</b>	
Power Supply	POC (only CVI)/12V±30% DC
Power Consumption	Max6.4W (12 VDC, IR on); PoC (AT)
<b>Environment</b>	
Operating Temperature	–30 °C to +60 °C (–22 °F to 140 °F); < 95% (non-condensation)
Storage Temperature	–30 °C to +60 °C (–22 °F to 140 °F); < 95% (non-condensation)
Protection Grade	IP67
<b>Structure</b>	
Casing	Metal throughout the whole casing
Camera Dimensions	Φ122 mm × 104.8 mm ( Φ4.80" × 4.13" )
Net Weight	0.59 Kg (1.3 lb)
Gross Weight	0.74 Kg (1.6 lb)

Ordering Information		
Type	Model	Description
2MP Camera	DH-HAC-HDW1200TP-Z-A-POC	2MP HDCVI POC Motorized Vari-focal IR Eyeball Camera, PAL
	DH-HAC-HDW1200TP-Z-A-POC	2MP HDCVI POC Motorized Vari-focal IR Eyeball Camera, NTSC
Accessories (Optional)	PFA130-E	Water-proof Junction Box
	PFB203W	Wall Mount Bracket
	PFA152-E	Pole Mount Bracket
	PFA106	Mount Adapter
	PFB220C	Ceiling Mount Bracket
	PFM321D	12V 1A Power Adapter
	PFM904	Integrated Mount Tester

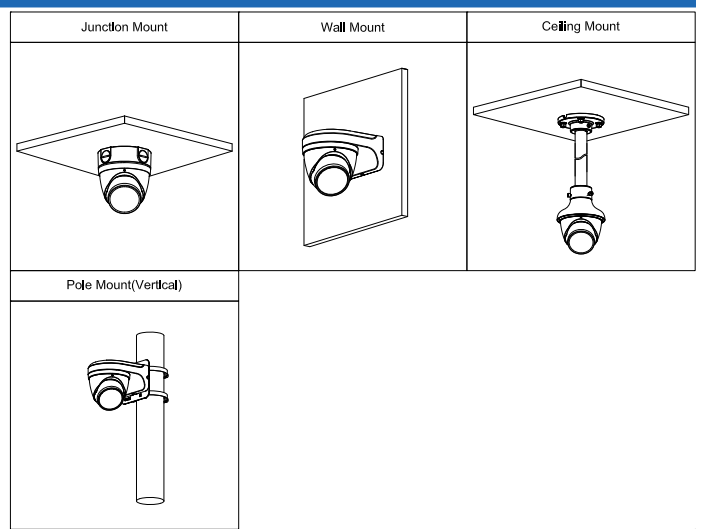

**Accessories**

Optional:

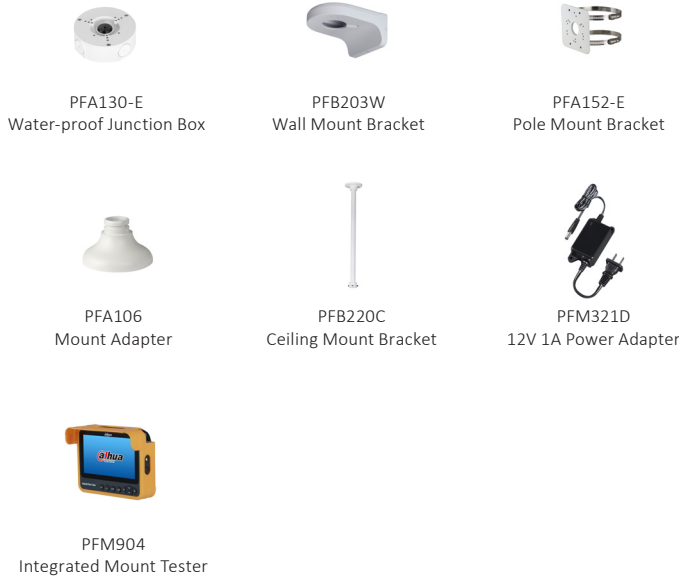

**Dimensions (mm[inch])**

